

Handling HF 120 / HF 400

the product



HF 400

For centerless grinding machines

- 150 SL 20D
- 150 SL 20
- 150 SL 30 CNC

The Handling HF 120 and HF 400

have been developed to load cylindrical workpieces automatically for plunge- and through-feed grinding on the 150 SL 20D, 150 SL 20 and 150 SL 30 CNC machines.

The Handling HF 120


is used for workpiece diameter 1.5 mm up to 6.0 mm and length from 20 mm up to 120 mm

The Handling HF 400

is used for workpiece diameter 0.5 mm up to 3 mm and length from 60 mm up to 300 mm (other dimensions on request)

The Handling HF 120 and HF 400

are installed at the front of the machine on a carrier which can be swiveled. The operating elements to control the loader are located on the operating panel of the machine control.

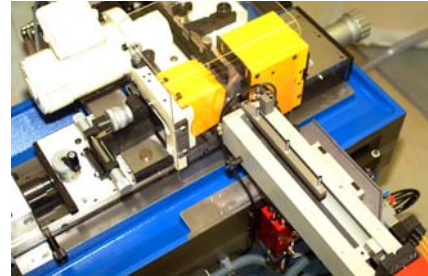

HF 400



HF 400



HF 120

SL 4005.2 / Date: 12.09.2007 / Subject to technical modifications



AGATHON AG, Maschinenfabrik
Postfach 332
CH-4512 Bellach
Tel +41 (0)32 617 4500
Fax +41 (0)32 617 4700
spitzenlos@agathon.ch
www.agathon.ch